


# Z-24G

Laser with  $\varnothing$  20mm

**Z-LASER**

- Green laser, ideal for machine integration
- Power stabilisation by feedback photo diode
- Large cooling surface for optimum heat dissipation

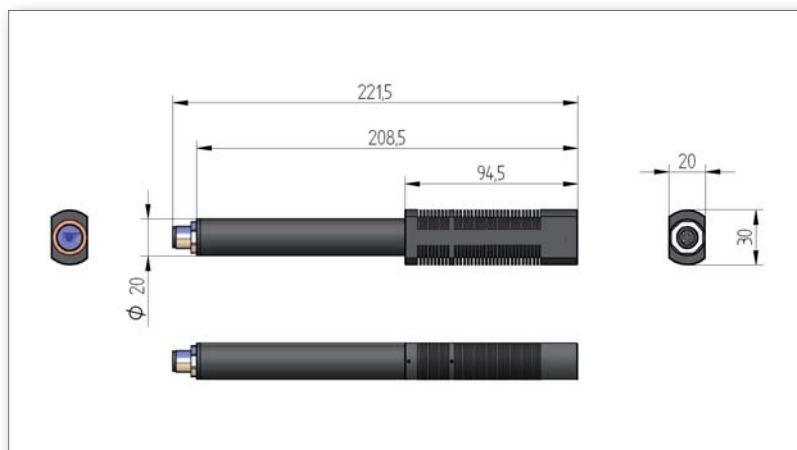

## Specifications

Output Power/Wavelength	1 to 20mW, 532nm
Housing/IP code	Aluminium, black anodised/ IP 64
Case temperature	0°C to 30°C
Supply voltage	24VDC
Electrical connection	M12 connector

## Electronics

Laser driver	APC with current limiter, overtemperature protection with indicator (blinking)
Supply	reverse polarity protection
Modulation	none
Intensity control	none
Available optics	all optics except -lg90a
Free focus option	none

## Accessories\*

Power Supply	NG CW 12/24
Mountings	H0-20, H2-20, H3-20, H4-20, H6-20, H8-20, Mxyz
Auxiliary mountings	BK, BM, BT
Manual or motor driven displacement systems	LS/LW, ZES
Accessories for optics	LB20, LZB

\* for details please refer to detailed data sheets

DB\_e\_LL\_Z-24G\_1.0\_161107\_MS

Z-LASER Optoelektronik GmbH • Merzhauser Str. 134 • 79100 Freiburg • Germany  
Tel.: +49/761/296 44 44 • Fax: +49/761/296 44 55 • info@z-laser.de • www.z-laser.com

08/2007